



YANMAR

Power Tiller

GT-1



ヤンマー株式会社

〒530-8311 大阪市北区茶屋町1-32
YANMAR FLYING-Y BUILDING
yanmar.com



このカタログの仕様は、改良などにより、予告なく変更することがあります。



この印刷物は
植物油インキを使用しています。

⚠ 安全に関するご注意

- ご使用の際は、取扱説明書をよくお読みのうえ、正しくお使いください。
- 無理な運転は商品の寿命を縮め、故障・事故の原因となることがあります。
- 故障・事故を未然に防止するため、定期点検は必ずおこなってください。
- 保証書はご購入の取扱い店で必ずお受け取りください。

Sample

商品についてのご意見、ご質問は下記へ…

YOUR BEST PARTNER **GT-1**

"POWERFUL" & "LOW FUEL CONSUMPTION"
"GREAT QUALITY"
"DURABILITY"
GT-1 meets your expectation.



MORE DETAIL



**NEW
DESIGN**



DISC PLOW



BOTTOM PLOW



RUBBER TIER & TRAILER



PADDLER



**POWER &
ECOLOGY**

JAPAN BRAND YANMAR
WITH ASIAN PEOPLE
MORE THAN 70YEARS.




TF90N / Diesel 493cc
MAX 9PS

TF120N / Diesel 638cc
MAX 12PS

TF150N / Diesel 716cc
MAX 15PS

HIGH PERFORMANCE

Maximum 15PS ENGINE acceptable.
Balance powerfulness and
low-fuel consumption.
Comfortable operation.

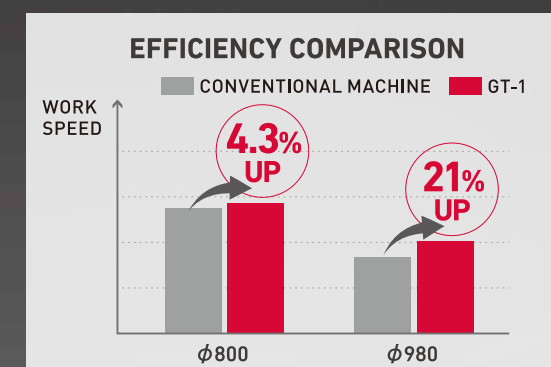


POWERFUL, LOW FUEL CONSUMPTION, LONG LIFE



POWERFUL, LOW FUEL CONSUMPTION, LONG LIFE

YANMAR's leading direct fuel injection system has greatly reduced the specific fuel consumption ratio.

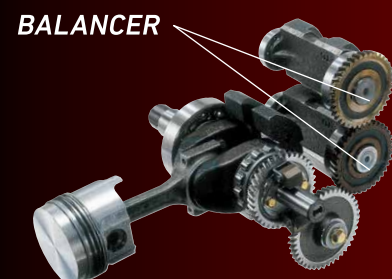

LOW VIBRATION

YANMAR's unique two-balancer shaft eliminates resonance by reducing both acceleration and amplitude. The imbalance is internally absorbed and as a result, vibrations are reduced at their source.



LARGE SIZE SILENCER

A large size silencer is adopted.

COMFORTABLE WORK, EASY MAINTENANCE



VISIBLE OIL/WATER SEPARATOR

An oil/water separator provided on the filter bowl allows at a balance checking of the water volume deposited in the filter. A separator with one-touch type automatic air bleeder allows air bleeding by simple lever operation. No fuel spillage, and no tools are required.



OIL SIGNAL

Oil signal color changes allow easy checking to see if lubrications oil pressure is normal.

BLUE : Normal pressure
RED : Abnormal pressure



EASY ADJUST

Adjustable V-belt tension without tools.



OIL-BATH TYPE AIR CLEANER

The oil-bath type air cleaner is adopted. Any fine dust is not missed and pure air is supplied.

HIGH OPERABILITY

Great operability to create high efficiency work

MAIN SHIFT LEVER



MAIN CLUTCH LEVER



TOOL BOX



ADJUSTABLE TREAD



TH-A(KH,MM)
1055,1105,1155,1205
TH-B,TH-C
1215,1265,1315

HEAD LIGHT SWITCH

The head light can be lit within a hands reach.
High/low beam can be switched as well.




ASSIST CLUTCH LEVER

You can declutch from under handle when the handle lifts up.



FOR YOUR HEAVY WORK

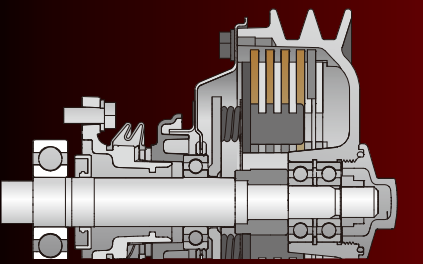


TRANSMISSION CAPABILITY

4 friction plates use.



FOR LONG LIFE

Transmission case FCD
High durability bearing.

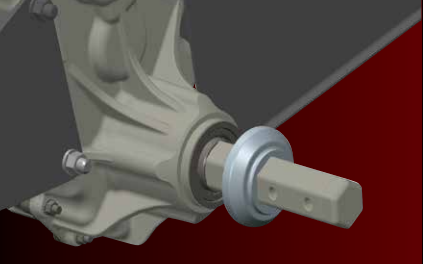

HIGH WATER PROOF

Oil seal & seal cap.

GT-1 Specifications

Model name				GT-1							
Specification				TH-A(KH,MM)		TH-B		TH-C			
Body dimensions	Total length			(mm)		3055					
	Overall width			(mm)		1055-1205		1215~1315			
	Overall height			(mm)		1225		1265		1315	
mass (without engine)				(kg)		215		234		252	
Engine		Applying horsepower				~15HP					
Traversing portion	Wheel (diameter X wides)			(mm)		800 X 275		880 X 320		980 X 320	
	Diameter of engine pulley			(in.)		5.5		4.0			
	V-Belt		Size		B72		B70				
			Length		(in.)		72		70		
			Quantity		(pcs)		2				
	Speed traversing at Engine speed 2400rpm (km/h)		With AG-Tire size 5-12		F1		5.1		3.6		
					F2		9.6		6.8		
					F3		24.2		17.0		
					R1		3.7		2.6		